


2-VALVE BLOCK MANIFOLD - SOFT SEAT







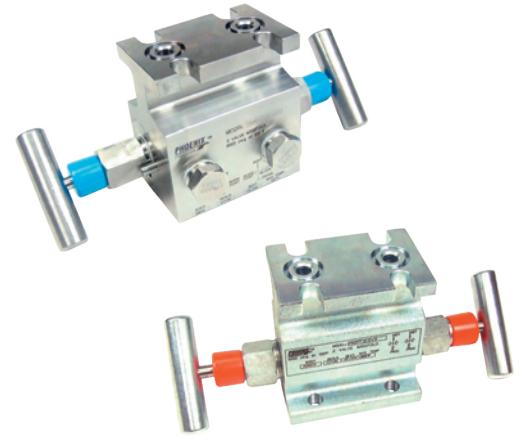


3/8" Bore 2-Valve Manifold

The 2-valve block manifold is designed to use in conjunction with a 5-valve manifold to eliminate the need to blow down an entire meter run when performing maintenance or when transferring measurement equipment to an alternate site. These manifolds also provide additional clearance needed in certain applications. The 2-valve block is available in both straight (MB2S) and 90 degree (MBA2S) configurations to accommodate vertical and horizontal-to-vertical applications. The MB2S features non-rotating stem tips and large handles with rounded corners for easy, comfortable operation. For more economical and/or compact installations see Phoenix's stabilized connector with block valve (ST6S).




Standard Features

Benefits


- | | | |
|--|---|---|
| Hydrotested at 150% of rated pressure (shell test). Nitrogen gas tested to 2000 psi. |  | Complies with ASME B31.1 & B31.3 shell testing procedures as standard. Ensures structural integrity of valve. |
| Seat tightness (zero leakage) verified to 110% of rated pressure. Nitrogen gas tested to 2000 psi. |  | Complies with ASME B31.1 & B31.3 seat testing procedures as standard. Ensures zero leakage at seats for proper calibration. |
| Packing below stem threads |  | Prevents corrosion of critical stem threads |
| Metal body-to-bonnet seals are in compression, not tension |  | Mitigates risk of stress cracking |
| Stem threads are rolled, not cut |  | Higher quality stem for longer service life |
| Non-rotating tapered tip stem |  | Extended soft seat life and a reliable soft seat shut off |
| 8 RMS stem finish |  | Extended packing life |
| V-Style Teflon™ packing |  | 30-40% less operational torque and less frequent packing adjustments than traditional Teflon™ packed valves. |
| Pressure component materials sourced from the US, Canada or Europe |  | Reliable material traceability. MTR's provided with every order for pressure containing components. |

P6MB2S Straight Configuration

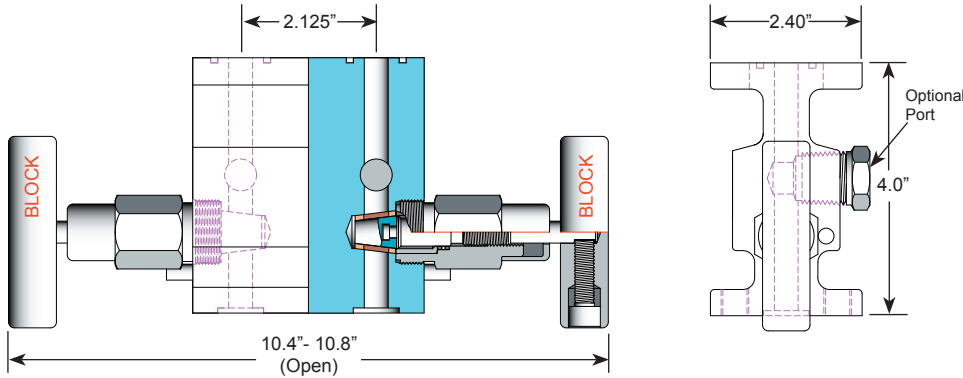


Specifications:

Type: **P6MB2S** FxF Manifold, Roddable Pattern
 Rating: Up to 6000 psi @ 100°F (41370 kPa @ 38°C)
 Stem: Non-rotating Tapered Tip
 Packing: Viton™ O-ring or Teflon™
 Seat: Delrin™, Peek™ or Tefzel™
 Handle: Removable
 Bore Size: 3/8"
 Inlet Connections: 4-Bolt Flange
 Outlet Connections: 4-Bolt Flange
 Bonnet Lock: Pin or Plate
 Body Stock: 3.625" x 4.0" x 2.4" x 1.7"
 Weight: 7.6 - 7.8 lbs
 Special Service: O₂ or CL cleaning available*
 *Other specifications or services may be available.

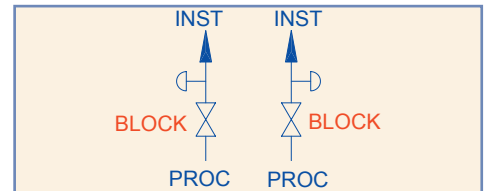


P6MBA2S 90° Angle Configuration

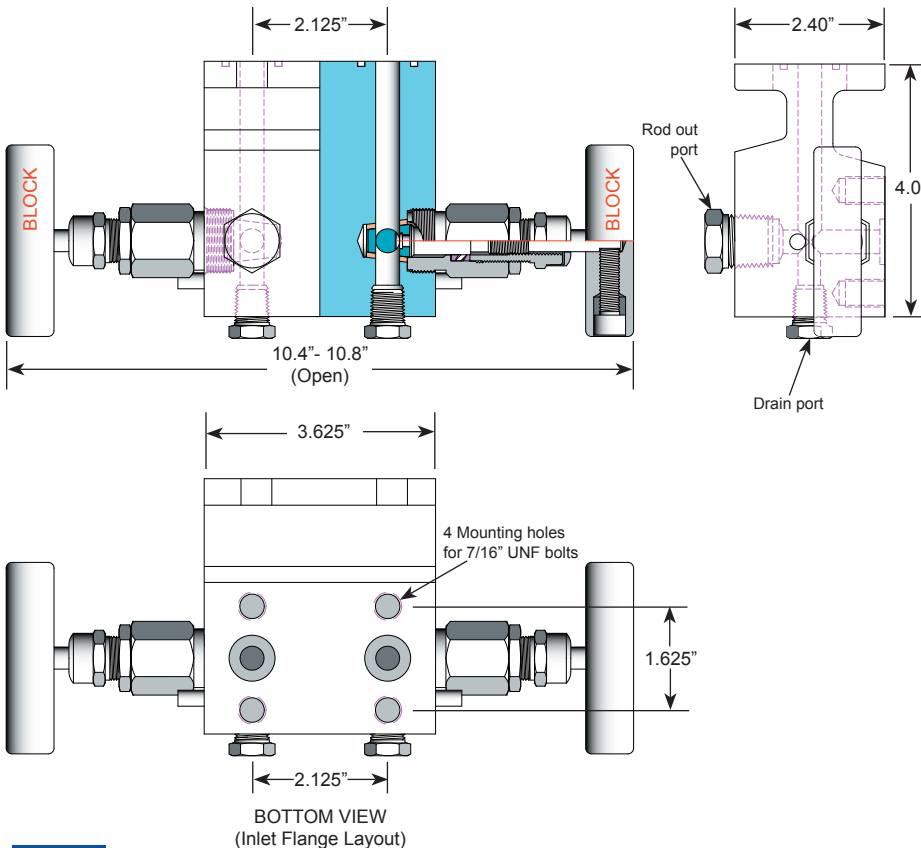


Specifications:

Type: **P6MBA2S** Angle FxF Manifold, Roddable Pattern
 Rating: Up to 6000 psi @ 100°F (41370 kPa @ 38°C)
 Stem: Non-rotating Tapered Tip
 Packing: Viton™ O-ring or Teflon™
 Seat: Delrin™, Peek™ or Tefzel™
 Handle: Removable
 Bore Size: 3/8"
 Inlet Connections: 4-Bolt Flange
 Outlet Connections: 4-Bolt Flange
 Bonnet Lock: Pin or Plate
 Body Stock: 3.625" x 4.0" x 2.4" x 2.4"
 Weight: 9.2 - 9.4 lbs
 Special Service: O₂ or CL cleaning available*
 *Other specifications or services may be available.

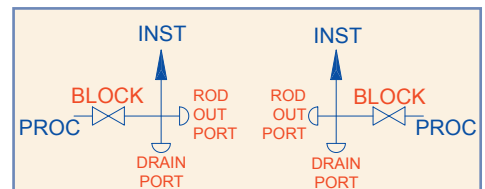



3/8" Bore O-ring Bonnet Assembly

Standard Materials						
Valve	Body	Bonnet	Stem	Insert	Handle	Packing
CS	ASTM A108CS	ASTM A108CS	ASTM A582 303SS	ASTM A108 CS	ASTM A108 CS	Dual Viton™ O-ring with Teflon™ backup ring
SC	ASTM A105CS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS	
SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS	

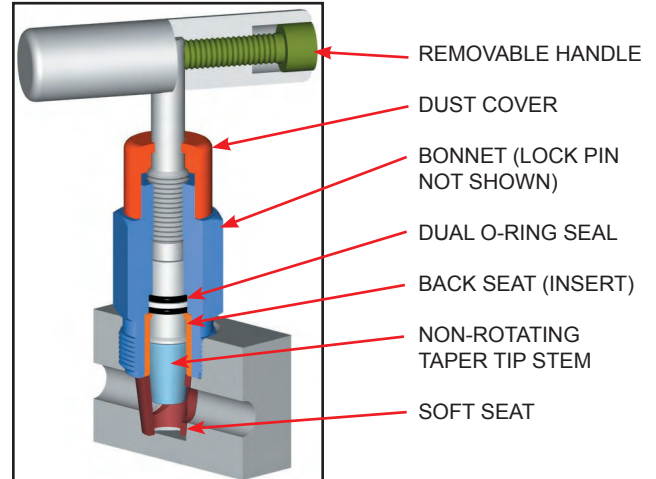


3/8" Bore Packed Bonnet Assembly


Standard Materials						
Valve	Body	Bonnet	Stem	Adjuster	Handle	Packing
CS	ASTM A108CS	ASTM A108CS	ASTM A582 303SS	ASTM A108 CS	ASTM A108 CS	"V" shape Teflon™
SC	ASTM A105CS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS	ASTM A582 303SS	
SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A182 316SS	ASTM A582 303SS	ASTM A582 303SS	

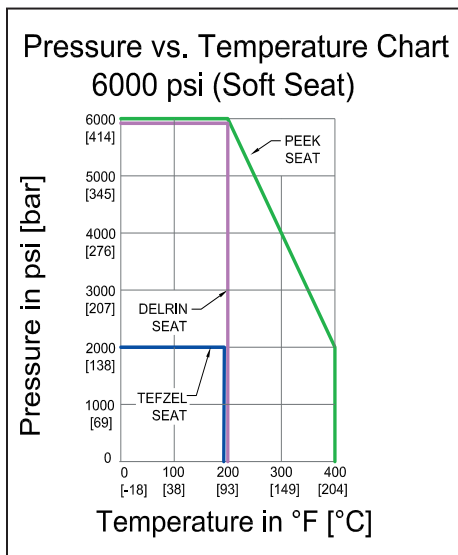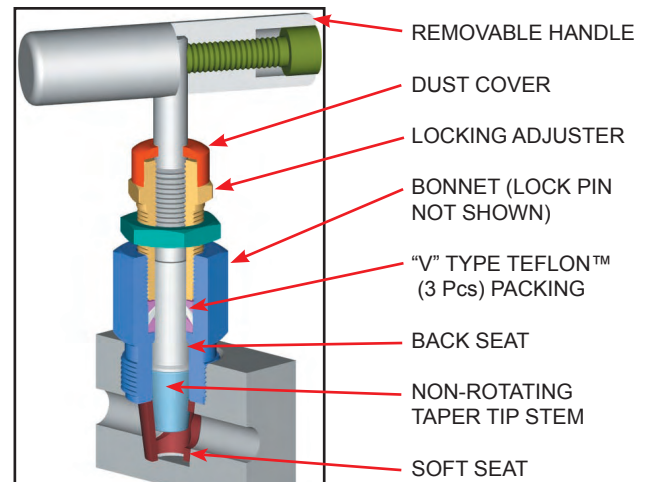

Stem and Seat Configurations



3/8" Bore
Non-rotating Packed



3/8" Bore
Non-rotating O-ring

Note: Packing material ratings based on manufacturer's specifications. Approximations only. Phoenix does not represent these values as finite. They are provided only as representative values.

Phoenix	Orifice Size	Type	Inlet	Outlet	Material	Packing	Seat	Option Code
P	6=3/8"	MB2S	FL=Flange	FL=Flange	SS=ASTM A182 316/316L	A=Aflas™	D=Delrin™	DI=Dielectric
		MBA2S			SC=ASTM A105 CS*	V=FKM	P=Peek™	OR=Viton™ O-ring Flange Seal
					CS=ASTM A108 CS*	T=PTFE	Z=Tefzel™	S6=316SS Bolts
EXAMPLE: P6MB2SFLFLSSVD = 3/8" Orifice, Flange Inlet, Flange Outlet, 316SS, Viton™ Packing, Delrin™ Seat								
P	6	MB2S	FL	FL	SS	V	D	
*For code applications, A108 CS is unacceptable, A105 CS must be selected for CS valves. Note: Standard Bolting Options , CS - carbon steel, Gr.8, zinc plated bolts; SS - stainless steel, 18.8 (304SS) bolts.								

**Use with Confidence, Phoenix Precision
Products Meet the Following Specifications:**

- ✓ ASME B31.1 Power Piping
- ✓ ASME B31.3 Process Piping
- ✓ ASME B16.34 Valves - Flanged, Thread, and Welding End
- ✓ API 598 Valve Inspection and Testing
- ✓ MSS SP-25 Standard Marking Systems for Valves, Fittings and Flange Unions
- ✓ MSS SP-99 Instrument Valves
- ✓ MSS SP-105 Instrument Valves for Code Applications
- ✓ NACE MR0175 for all 316SS valves and A105CS body/316SS bonnet (SC Material Code)

Seal & Seat Temperature Rating

Code	Description	Min. Temp.	Max. Temp.
A	Aflas™	15°F (-10°C)	400°F (204°C)
V	Viton™	-20°F (-29°C)	400°F (204°C)
T	Teflon™	-65°F (-54°C)	450°F (232°C)
D	Delrin™	-40°F (-40°C)	200°F (93°C)
P	Peek™	-40°F (-40°C)	400°F (204°C)
Z	Tefzel™	-300°F (-185°C)	300°F (150°C)

For further information please contact:

Phoenix Precision Ltd.
2620 21st Street N.E.
Calgary, Alberta T2E 7L3
Phone:(403) 291-3154
Fax: (403) 291-3292
email: phoenix@phoenixprecision.ca
www.phoenixprecisionvalves.com



Distributor / Representative:

Phoenix Precision Ltd. (PPL) provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. The information contained herein is intended only as a guide to PPL products and services. Individuals using information must exercise independent judgment in evaluating product selection and determining product appropriateness for their particular purpose and system requirements. PPL MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, PPL WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Patents and Patents Pending in the U.S. and foreign countries. PPL reserves the right to change product designs and specifications without notice.

DELTRIN, TEFLON, VITON and TEFLON are registered trademarks (hereinafter referred to as TM) of E.I. Du Pont De Nemours and Company Corporation. PEEK is a registered TM of Whitford Worldwide Company and Whitford B.V. KEL-F is a registered TM of M.W. Kellogg Company. GRAFOIL is a registered TM of High Temperature Materials Inc. and Graftech INC. Corporation. AFLAS is a registered TM of Asahi Glass Co. Ltd. Corporation Japan. MONEL and INCONEL are registered TMs of Huntington Alloys Corporation. HASTELLOY is a registered TM of Haynes International, Inc.

© 2010 by Phoenix Precision Ltd. All rights reserved. Material in this brochure or catalogue may not be reproduced in whole or in part, in any form, without written permission from the publisher.